




## GSM AUDIO INTERCOM

- Choice of Male or Female function voice announcement.
- Control 2 Gates or Doors via 2 x relay outputs.
- 5 Call Out Numbers
- 200 Call In Numbers.
- Automated Schedules.
- Do Not Disturb Mode.
- Attractive & Modern Back Light and Side Lights.
- Downloadable Activity Log.
- Programmable Security Code.
- Free Installer Programming App.
- End User App.
- IP55 Waterproof Housing



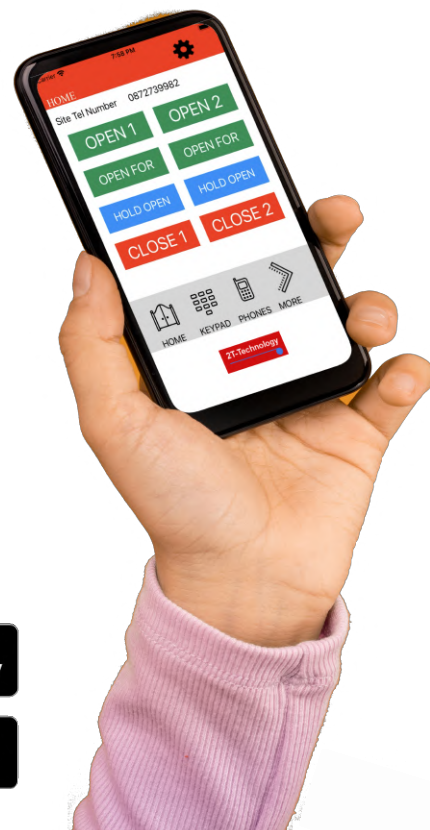

Ultra stylish and attractive GSM audio intercom that's sure to compliment any professional installation. Featuring 5 dial out numbers and 200 dial in numbers. Available with an integrated keypad or without. Call station features a gloss black acrylic face plate with ice cool blue LED call button and courtesy side lights.

## PRODUCT ORDERING CODES

### VOYAGER VOICE WITH KEYPAD

GSM,INTERCOM,VV,K

### VOYAGER VOICE WITHOUT KEYPAD

GSM,INTERCOM,VV

<b>Power</b>	12V DC 2 Amp (supplied)
<b>Call Out Phone Numbers</b>	5
<b>Dial to Open users</b>	200
<b>Keypad Operation</b>	10 x 4 Digit codes for any number of users. 24 x 7 Or Time and Day limited Codes Temporary Lifetime Code available Remove, List & Configure all codes
<b>Method of programming</b>	SMS Text and Mobile Phone App
<b>Method of operation</b>	<ul style="list-style-type: none"> <li>- Press the intercom call panel</li> <li>- Dial to open (no call cost) and SMS text</li> <li>- Enter 4 digit pre configured Keypad code</li> </ul>
<b>Pulse Time</b>	3 seconds (Configurable).
<b>Gate open for fixed period</b>	SMS command or App. Programmable time period. From a minute to many hours.
<b>Security Settings</b>	4 Digit security code can be applied to all SMS Text.
<b>Number of Inputs</b>	2
<b>SMS Text on gate open/close</b>	Control Phone or Phone 1
<b>Gate Status</b>	SMS text to query if gate open.
<b>Keeps SIM on the network</b>	Text sent by device to Control Phone or Phone 1, every 75 days to add credit.
<b>Automatic Schedules for Output 1 or Output 2</b>	10 schedules that can be specified by day and time. It can be specified with a limited lifetime if required.